
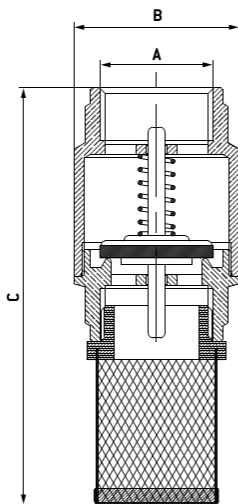


1020...

EUROPA WITH STRAINER

CHECK VALVES

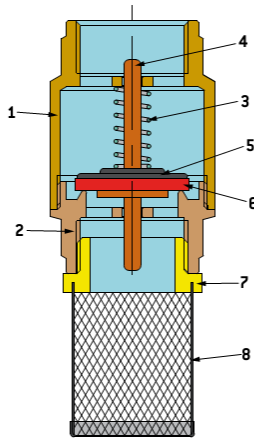

- Europa check valve with strainer
- Female thread: ISO 228
- Strainer with hole from 3/8" to 2" 1200 micron
Strainer with hole from 2.1/2" to 4" 2000 micron
- Temperature range: -20°C to +100°C

This valve is particularly indicated for use in suction lift pumps for the non-return of generally non-corrosive fluids that are compatible with the valve materials.

Excellent fields of application are in plant engineering for plumbing and heating, industry, agriculture and pneumatics.

The direction of flow is indicated by an arrow on the valve body. It can be installed in any position.

Seat seal is provided by a NBR gasket.

COMPONENTS:

POSN.	PART NAME	No. Pcs.	MATERIAL
1	Body	1	CW617N UNI-EN 12165
2	End connection	1	CW617N UNI-EN 12165
3	Spring	1	AISI 302 stainless steel
4	Guide pin	1	CW617N UNI-EN 12164
5	Plate	1	AISI 304 stainless steel
6	Gasket	1	NBR
7	Collar	1	Nylon
8	Filter	1	AISI 304 stainless steel

DIMENSIONS:

DN	A	B	C	PN
10	3/8"	35	90	25
15	1/2"	35	98	25
20	3/4"	42	114	25
25	1"	48	133	25
32	1.1/4"	61	147	18
40	1.1/2"	71	165	18
50	2"	87	187	18
65	2.1/2"	120	230	12
80	3"	140	265	12
100	4"	173	296	12

PACKAGING:

	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"
CODE	10200003	10200004	10200006	10200008	10200010	10200011	10200013	10200015	10200017	10200019
PIECES PER BOX	10	10	6	6	4	2	2	-	-	-
PIECES PER CARTON	160	160	114	76	48	36	20	9	6	5

