

**1030...**

**LOIRA WITH STRAINER**

CHECK VALVES





- Loira check valve with strainer
- Female thread: ISO 228
- Strainer with hole of 1200 micron
- Temperature range: 0°C to +90°C

This valve is particularly indicated for use in suction lift pumps for the non-return of generally non-corrosive fluids that are compatible with the valve materials.

Excellent fields of application are in plant engineering for plumbing and heating, industry, agriculture and pneumatics.

The direction of flow is indicated by an arrow on the valve body. It can be installed in any position.

Seat seal is provided by a NBR gasket.

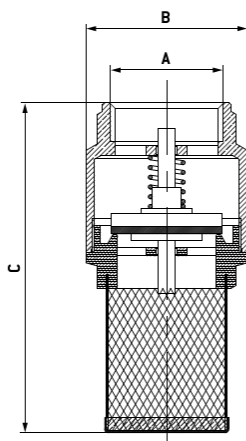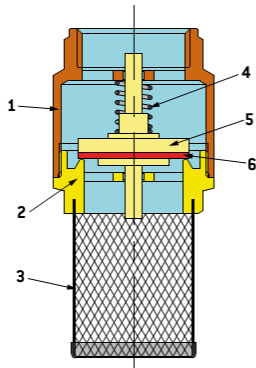

**COMPONENTS:**

POSN.	PART NAME	No. Pcs.	MATERIAL
1	Body	1	CW617N UNI-EN 12165
2	End connection	1	Nylon
3	Filter	1	AISI 304 stainless steel
4	Spring	1	AISI 302 stainless steel
5	Valve	1	Nylon
6	Gasket	1	NBR

**DIMENSIONS:**

DN	A	B	C	PN
10	3/8"	34	70	10
15	1/2"	34	81	10
20	3/4"	42	87	10
25	1"	48	97	10
32	1.1/4"	60	110	8
40	1.1/2"	69	125	8
50	2"	85	145	8
65	2.1/2"	102	165	6
80	3"	125	185	6
100	4"	154	215	6

**PACKAGING:**

	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"
CODE	10300003	10300004	10300006	10300008	10300010	10300011	10300013	10300015	10300017	10300019
PIECES PER BOX	25	25	15	12	6	4	2	—	—	—
PIECES PER CARTON	250	250	150	180	90	60	30	20	15	10

