
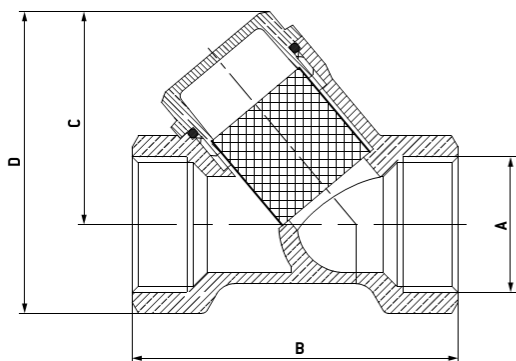


1905...

BRASS Y STRAINER

STRAINERS



- F/F brass Y strainer
- Strainer with 350 micron hole - 50 mesh
- Female/Female thread: ISO 228
- Temperature range: 0°C to +95°C

This strainer is particularly indicated for filtering generally non-corrosive fluids that are compatible with the valve materials.

Other excellent fields of application are in plant engineering for plumbing and heating, industry, agriculture and pneumatics.

The direction of flow is indicated by an arrow on the valve body. It can be installed either horizontally or vertically.

Seat seal is provided by a NBR gasket.

COMPONENTS:

POSN.	PART NAME	No. Pcs.	MATERIAL
1	Body	1	CW617N UNI-EN 12165
2	Cap	1	CW617N UNI-EN 12164 (for 3/8" and 1/2") CW617N UNI-EN 12165 (3/4" to 2")
3	Cap gasket	1	NBR
4	Strainer	1	AISI 304 stainless steel

DIMENSIONS:

A	B	C	D	PN
10	3/8"	57	48	16
15	1/2"	57	48	16
20	3/4"	66	58	16
25	1"	80	73	16
32	1.1/4"	92	88	16
40	1.1/2"	101	98	16
50	2"	121	121	16

PACKAGING:

	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"
CODE	19050003	19050004	19050006	19050008	19050010	19050011	19050013
PIECES PER BOX	-	-	-	-	-	-	-
PIECES PER CARTON	150	150	100	50	50	35	20