
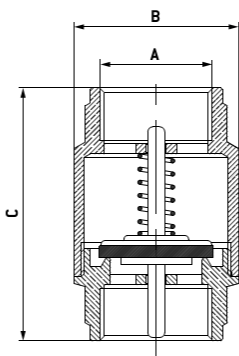


COMPONENTS FOR PLUMBING AND HEATING

1000...

EUROPA

CHECK VALVES



- Europa check valve
- Female thread: ISO 228
- Temperature range: -20°C to $+100^{\circ}\text{C}$

This valve is particularly indicated for use in non-return systems with generally non-corrosive fluids that are compatible with the valve materials. Excellent fields of application are in plant engineering for plumbing and heating, industry, agriculture and pneumatics.

The direction of flow is indicated by an arrow on the valve body. It can be installed in any position.

Seat seal is provided by a NBR gasket.

COMPONENTS:

POSN.	PART NAME	No. Pcs.	MATERIAL
1	Body	1	CW617N UNI-EN 12165
2	End connection	1	CW617N UNI-EN 12165
3	Spring	1	AISI 302 stainless steel
4	Guide pin	1	CW617N UNI-EN 12164
5	Plate	1	AISI 304 stainless steel
6	Gasket	1	NBR

DIMENSIONS:

DN	A	B	C	PN
10	3/8"	35	55	25
15	1/2"	35	59	25
20	3/4"	42	65	25
25	1"	48	75	25
32	1.1/4"	61	83	18
40	1.1/2"	71	93	18
50	2"	87	101	18
65	2.1/2"	120	122	12
80	3"	140	142	12
100	4"	173	159	12

PACKAGING:

	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"
CODE	10000003	10000004	10000006	10000008	10000010	10000011	10000013	10000015	10000017	10000019
PIECES PER BOX	10	10	8	6	4	4	2	—	—	—
PIECES PER CARTON	170	170	120	78	48	36	24	12	8	5